

NIVOflex®-Event

The platform for the professional operation



NIVOflex®-Event – High-Tech design. Internationally approved.

- ☐ height adjustable plug-in foot platform
- ☐ fast erecting and dismantling
- ☐ height levelling possible (telescope legs)
- ☐ available in various surfaces
- ☐ non-slip with large-area rubber feet
- ☐ tested stability in conformity with DIN 4112
- ☐ construction manual for stages and tribunes up to 4 m high
- ☐ GS stamp for approved safety

Product description

An extremely light plug-in foot platform with anodized smooth upper frame for the general event area, product presentation and the level equalization for industrial production flows. The integrated linking hooks serve to stabilize the platforms with each other. The special corner design can be used for attachment of accessories like curtains, banisters and much more. Clamping of the plug-in feet without tools and in a second. The 22 mm strong support plate is available with various surfaces. The ideal platform system for special sizes and special shapes.

Assembling and dismantling

Fast and easy. Approved integrated plastic hooks or clamp-binders provide a safe connection and simple operation. The plug-in feet can be installed without additional tools. The optional telescopic feet level uneven ground.



Technical data NIVOflex®-Event

- Dimensions 2x1 m
- Special sizes on request
- Payload 750 daN / m² with simultaneous pulling force of 1 / 10
- Maximum build-up height without diagonal reinforcement 1.66 m with diagonal reinforcement 4.00 m (according to the construction manual)
- weight 29 kg
- storage height 9 cm
- load-bearing surface 22 cm

Areas of operation

Presentation of events


Presentation of products

Industry




Through integrated plastic hooks the elements can be joined without pushing.

Higher dynamic forces are accepted with the use of joining clamps.

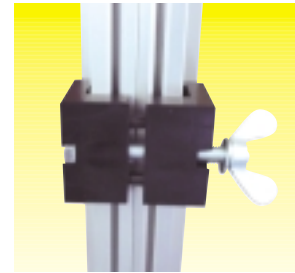


The platform corner guarantees a linking with different platform systems.

Small height differences in the hall floor are overcome through the use of spindle feet.

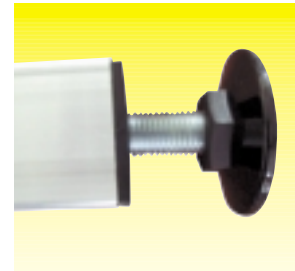

High-quality leg clamps accept leg sets (straight or telescopic legs) from 40 to 60 mm round or square.

All railings for Event are delivered with TÜV - GS stamp for approved static equilibrium.


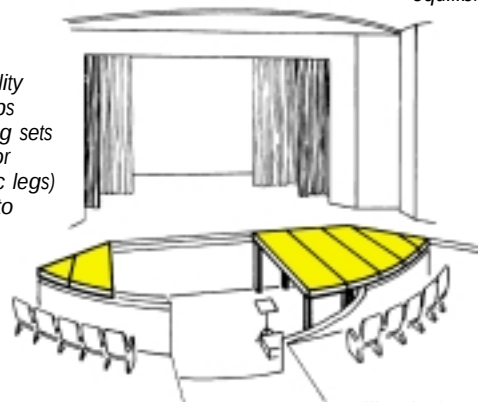


Profiling in the frame enables the attachment of textile or wood facing.



A variety of stair constructions with or without handrails is available.

Leg connectors in round or square form are used for assembly of stepped (rostrum) constructions.

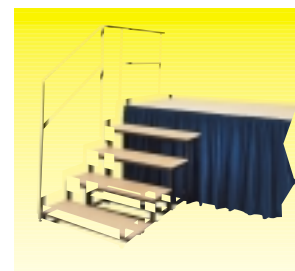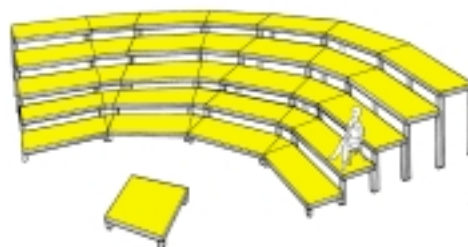

Storage and transport occur with transport trolleys. Even the use of plug-in rollers is possible.

