



NIVOflex®-Light

light, fast, ergonomic



NIVOflex®-Light. Ideal for special heights, special dimensions and special shapes.

- ❑ only weighs 29.5 kg
- ❑ available with various surfaces
- ❑ fast lock-in for legs ❑ 40/60 mm, ○ 48.3 mm
- ❑ tested static equilibrium in accordance with DIN 4112, 1055, 15920

Areas of operation


Presentation of events

Presentation of products


Industry



Plug-in 40 mm. Fixed length.

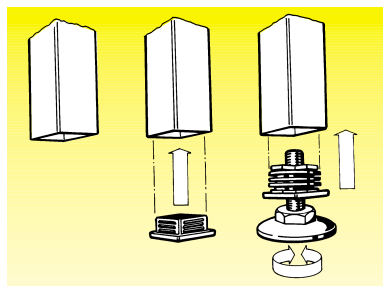

Standard foot. Middle. Levelling foot. Right. Optional for the levelling out of small unevenness.

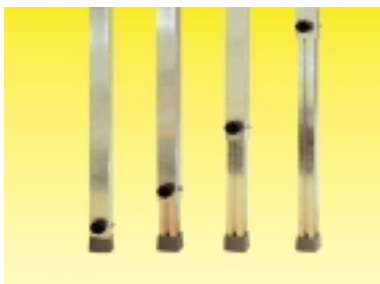

Plug-in 40 mm. Telescopic.

Assembling and dismantling

Quick and easy. Proven clamp-connectors provide a secure connection and simple handling. The plug-in feet can be assembled without additional tools. The optional telescopic feet level uneven ground, e.g. for outdoor use.

Technical data

NIVOflex®-Light

- Dimensions 2 m x 1 m
- Load 750 daN / m²
- Maximum adjustable height 100 cm
- Weight 29 kg
- Storage height 8 cm
- Load-bearing surface 22 mm